




# COMPACT BEARING CR 2000

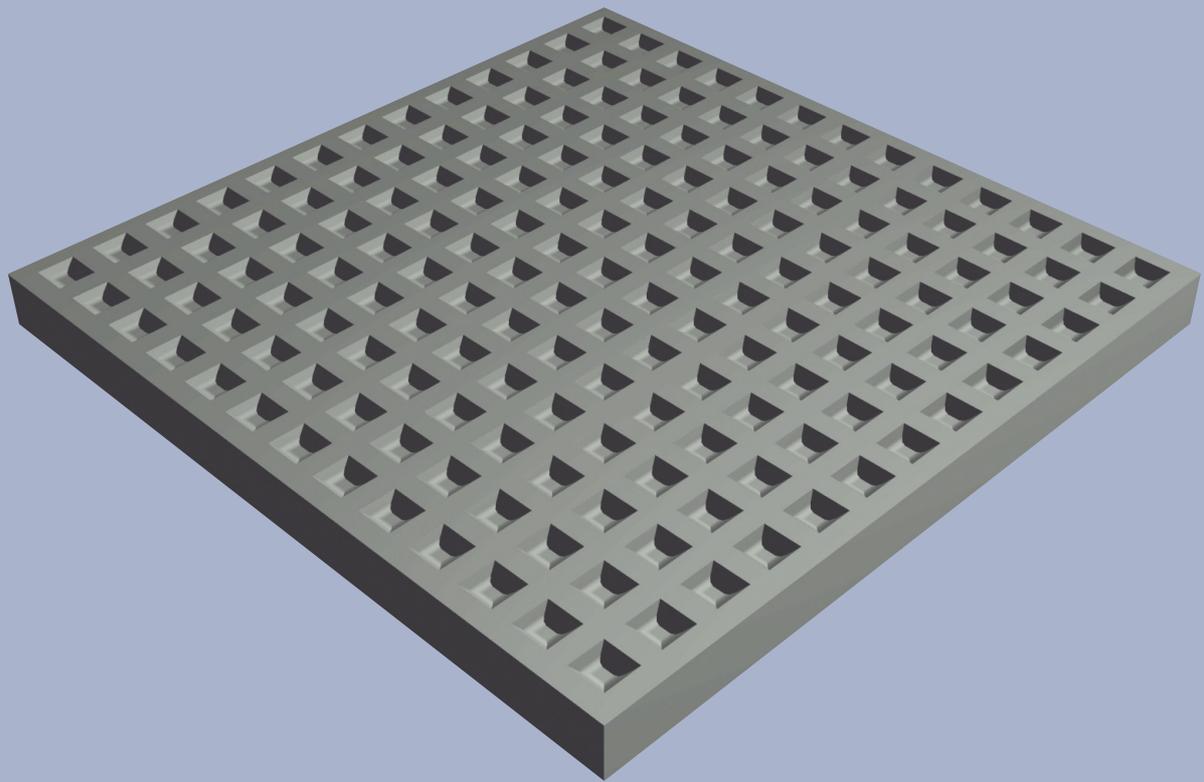

*Unreinforced elastomeric bearing  
loadable up to 20 N/mm<sup>2</sup>*

# Bearing design





## Contents

Bearing design formulae	Page 2
Product description	2
Shape factors	3
How to specify	3
Shear stiffness	4
Deflection	5
Design table 1	6
Design table 2	7
Transverse and splitting tensile stress reinforcement	8-9
Edge distances	10
Delivery forms	11
Installation	12
Test certificates	12
Fire behaviour	12
Areas of application	12

## Product description


The Calenberg Compact Bearing CR 2000 is a modified version of the CR Compact Bearing H – a bearing with years of proven performance and the first structural bearing with a design concept based on engineering design principles. It is manufactured from a chloroprene material with a hardness of  $70 \pm 5$  Shore A. The honeycombed bearing surface results in an even distribution of stress over the cross section. The transverse and splitting tensile stresses produced in the adjoining components are reduced compared with smooth elastomeric bearing plates.

**Note:** The high bearing pressure requires careful design and arrangement of the transverse and splitting tensile stress reinforcement in adjoining components.

Design using characteristic values in acc. with DIN 4141, Part 3 (BC 2)	
Load type	Formula
<b>All. mean compressive stress</b> 	$\text{All. } \sigma_m = \frac{S^2 + S + 1}{0.70} \leq 20 \text{ N/mm}^2$ <p>Shape factor S see page 3</p>
<b>All. shear deformation</b> 	$\text{All. } u = 0.6 \cdot (t-3) \text{ [mm]}$ <p>Horizontal force <math>H = C_{s(t)} \cdot u \cdot A_E / 19000</math> [kN]  <math>C_s</math> values and edge conditions see page 4</p>
<b>Bearing elastic deformation</b> 	<p>See page 5</p>
<b>Allowable rotation</b> 	$\text{All. } \alpha = \frac{200 \cdot t}{b} \leq 40 \text{ [‰]}; \text{ rectangular bearing}$ $\text{All. } \alpha = \frac{226 \cdot t}{D} \leq 40 \text{ [‰]}; \text{ circular bearing}$
<b>Transverse tensile forces *</b> 	$\text{Act. } Z_l = 1.5 \cdot F \cdot t \cdot l / A_E \text{ [kN]}$ <p>(towards bearing long side)</p> <hr/> $\text{Act. } Z_b = 1.5 \cdot F \cdot t \cdot b / A_E \text{ [kN]}$ <p>(towards bearing short side)</p>

\* More accurate proof to Booklet 339, DAFStb


$b, b_A, l, l_A, D, t, u$  in mm;  $A_E$  in mm<sup>2</sup>;  $H, ZS$  in kN;  $c_s$  in kN/mm,  $S$  without units

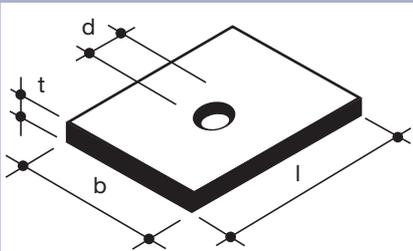

without hole:  $S = \frac{l \cdot b}{2 \cdot t \cdot (l + b)}$


with hole:  $S = \frac{4 \cdot l \cdot b - \pi \cdot d^2}{4 \cdot t \cdot (2 \cdot l + 2 \cdot b + \pi \cdot d)}$

Shape factor for rectangular bearing

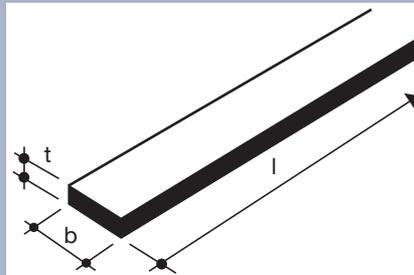

$$S = \frac{b}{2 \cdot t}$$

Shape factor for bearing strip

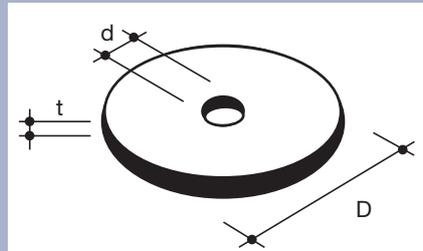

without hole:  $S = \frac{D}{4 \cdot t}$

with hole:  $S = \frac{D - d}{4 \cdot t}$

Shape factor for circular bearing pad

### How to specify

Supply Calenberg Compact Bearing CR 2000, unreinforced homogeneous elastomeric bearing in accordance with DIN 4141 Part 3, bearing classes 1 and 2, loadable depending on format up to a mean stress of 20 N/mm<sup>2</sup>, National Technical Test Certificate No. 850.0425, National Technical Approval No. Z-16.32-435.

### a) Standard installation

Length: ..... mm  
 Width: ..... mm  
 Thickness: ..... mm  
 Quantity: ..... No.  
 Preis: ..... €/piece

### b) Embedded in polystyrene or Ciflamon-fire-proofing plate

Overall length: ..... mm  
 Overall width: ..... mm  
 Elastomer length: ..... mm  
 Elastomer width: ..... mm  
 Thickness: ..... mm  
 Quantity: ..... No.  
 Preis: ..... €/piece

#### Supplier:

Calenberg Ingenieure GmbH  
 Am Knübel 2-4  
 31020 Salzhemmendorf, Germany  
 Phone +49(0)5153/9400-0  
 Fax +49(0)5153/9400-49

# Shape factor

# Shear stiffness


## Shear deformation

Proof of the horizontal shear deformation arising from non-repetitive horizontal forces is not required because small non-repetitive movements do not result in any detrimental change of the support provided by the bearing. A minimum compressive stress of 2.6 N/mm<sup>2</sup> is required in order for the bearing to accommodate the shear deformation. Proof of the shear deformation in accordance with the Approval Section 2.1.3.2 is required for use in bearing class 1 conditions.


## Stress distribution at a bearing joint

As part of Research Project F 233 of the Ministry for Urban Development, Housing and Transportation, NRW, stress distributions were investigated for various reinforced and unreinforced elastomeric bearings under practical conditions. The results showed that significant differences in the levels of stress concentrations existed between the various reinforced and unreinforced elastomeric bearings.


**In the group of unreinforced structural bearings investigated, the most even compressive stress distribution over the bearing cross section was found to be on the Compact Bearing CR 2000. The ratio of maximum stress to mean stress,  $\max. \sigma/\sigma_m$ , of 1.2 was the lowest encountered (see page 5).**

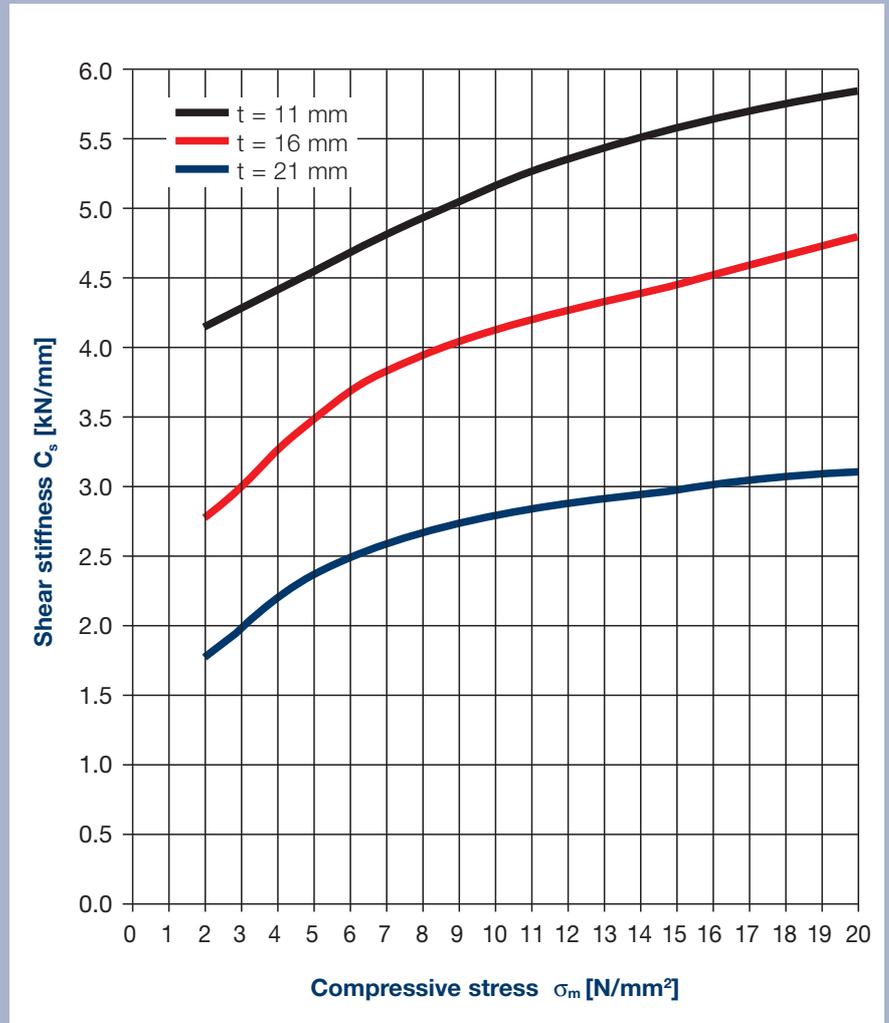

Shear stiffness  $C_s$  [kN/mm] according to compressive stress

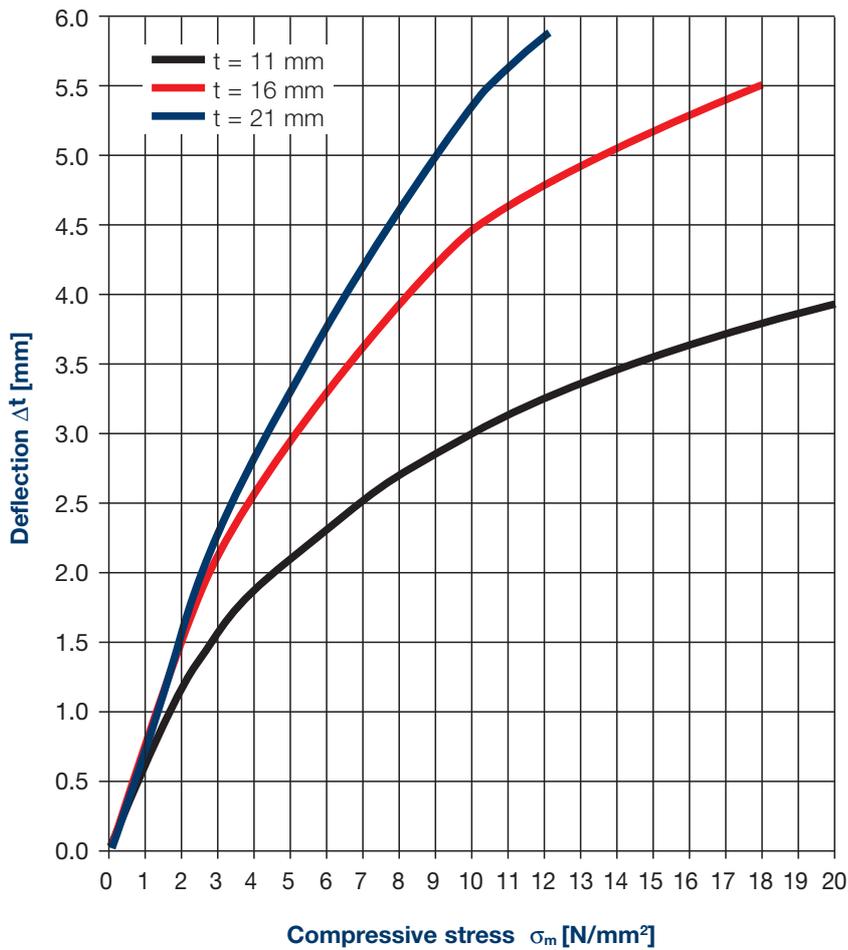

Elastic deformation  $\Delta t$  plotted against compressive stress (for guidance only)

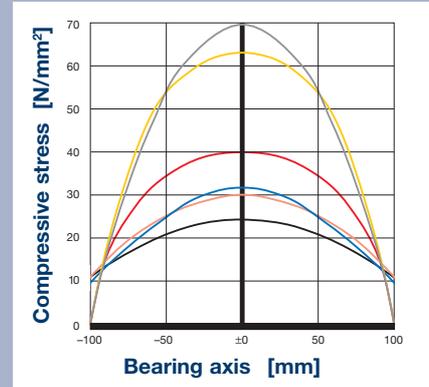

Stress distribution at a bearing joint on the axis of symmetry of the bearing surface of various unreinforced and reinforced elastomeric bearings.

**The following details apply to the bearings:**

Bearing surface = 200 · 200 mm<sup>2</sup>,  
centrally applied load.

- = Compact Bearing CR 2000,  
t = 20 mm,  $\sigma_m = 20$  N/mm<sup>2</sup>
- = Unreinforced EPDM bearing,  
t = 20 mm,  $\sigma_m = 20$  N/mm<sup>2</sup>
- = Unreinforced CR bearing,  
t = 20 mm,  $\sigma_m = 20$  N/mm<sup>2</sup>
- = Reinforced bearing with profiled contact  
surfaces, t = 30 mm,  $\sigma_m = 20$  N/mm<sup>2</sup>
- = Reinforced bearing with profiled contact  
surfaces, t = 30 mm,  $\sigma_m = 30$  N/mm<sup>2</sup>
- = Reinforced bearing with smooth contact  
surfaces, t = 30 mm,  $\sigma_m = 30$  N/mm<sup>2</sup>

## Deflection

# Design table 1


Compact Bearing CR 2000; 11 mm thick																			
Bearing thickness t [mm]	Bearing width b [mm]	All. rotation $\alpha$ [%]	Compressive stress, allowable $\sigma_m$ [N/mm <sup>2</sup> ]																
			Bearing length l [mm]																
			50	60	70	80	90	100	120	130	150	170	180	200	250	300	350	400	450
<b>11</b>	50	<b>40.0</b>	4.9	5.4	5.8	6.2	6.6	6.9	7.4	7.6	8.0	8.3	8.5	8.7	9.3	9.6	9.9	10.1	10.3
	60	<b>36.7</b>	5.4	6.0	6.6	7.1	7.6	8.0	8.7	9.1	9.6	10.1	10.3	10.7	11.5	12.1	12.5	12.9	13.1
	70	<b>31.4</b>	5.8	6.6	7.3	8.0	8.6	9.1	10.1	10.5	11.3	11.9	12.2	12.7	13.8	14.6	15.3	15.8	16.2
	80	<b>27.5</b>	6.2	7.1	8.0	8.7	9.5	10.1	11.3	11.9	12.9	13.7	14.1	14.8	16.2	17.3	18.2	18.9	19.5
	90	<b>24.4</b>	6.6	7.6	8.6	9.5	10.3	11.1	12.6	13.2	14.4	15.5	16.0	16.8	18.7				
	100	<b>22.0</b>	6.9	8.0	9.1	10.1	11.1	12.1	13.8	14.5	16.0	17.2	17.8	18.9					
	110	<b>20.0</b>	7.1	8.4	9.6	10.8	11.9	12.9	14.9	15.8	17.4	18.9	19.6						
	120	<b>18.3</b>	7.4	8.7	10.1	11.3	12.6	13.8	16.0	17.0	18.9								
	130	<b>16.9</b>	7.6	9.1	10.5	11.9	13.2	14.5	17.0	18.1									
	140	<b>15.7</b>	7.8	9.4	10.9	12.4	13.8	15.3	17.9	19.2									
	150	<b>14.7</b>	8.0	9.6	11.3	12.9	14.4	16.0	18.9										
	160	<b>13.8</b>	8.2	9.9	11.6	13.3	15.0	16.6	19.8										
	170	<b>12.9</b>	8.3	10.1	11.9	13.7	15.5	17.2											
	180	<b>12.2</b>	8.5	10.3	12.2	14.1	16.0	17.8											
	190	<b>11.6</b>	8.6	10.5	12.5	14.4	16.4	18.4											
	200	<b>11.0</b>	8.7	10.7	12.7	14.8	16.8	18.9											
	250	<b>8.8</b>	9.3	11.5	13.8	16.2	18.7												
	300	<b>7.3</b>	9.6	12.1	14.6	17.3													
	350	<b>6.3</b>	9.9	12.5	15.3	18.2													
	400	<b>5.5</b>	10.1	12.9	15.8	18.9													
450	<b>4.9</b>	10.3	13.1	16.2	19.5														
500	<b>4.4</b>	10.5	13.4	16.5	19.9														
550	<b>4.0</b>	10.6	13.6	16.8															
600	<b>3.7</b>	10.7	13.8	17.1															
650	<b>3.4</b>	10.8	13.9	17.3															
700	<b>3.1</b>	10.9	14.0	17.5															
750	<b>2.9</b>	11.0	14.1	17.7															
800	<b>2.8</b>	11.0	14.2	17.8															
850	<b>2.6</b>	11.1	14.3	18.0															
900	<b>2.4</b>	11.1	14.4	18.1															

**20**

Interpolate for intermediate values




# Transverse and splitting tensile stress reinforcement

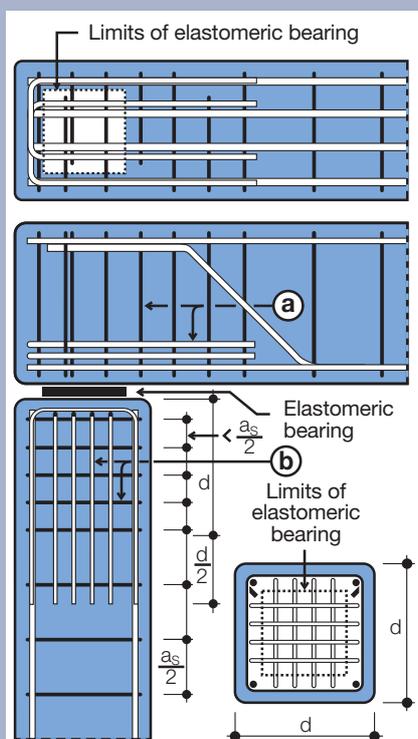

## Method A:

The transverse tensile stresses are picked up directly by the reinforcement close to where they are generated.

- a) Beam transverse tensile stress reinforcement: horizontal links and stirrups
- b) Column transverse tensile stress reinforcement: vertical links and additional stirrups, arranged to intersect at right angles

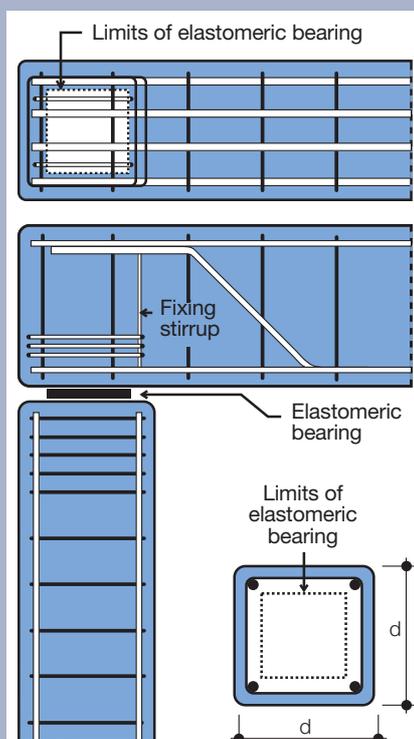


## Method B:

The transverse tensile stresses are picked up by the closed stirrup or link reinforcement enclosing the area of the bearing.

## Arrangement of transverse and splitting tensile stress reinforcement at the beam-column support point in the area of an elastomeric bearing

Transmission of force by direct contact between the longitudinal reinforcement and the bearing surface must be eliminated by suitable measures (e.g. plastic sleeves that prevent the transfer of peak pressure, see detail).

The longitudinal reinforcement must be enclosed by continuous external stirrup reinforcement. The splices in this reinforcement must be detailed in such a way that they cannot fail (e.g. by the stirrups opening).

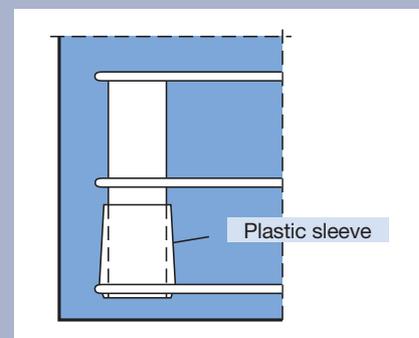

Detail

The figure on the right shows the shapes and arrangements of reinforcement links proven to be particularly suitable in numerous tests. In the splitting tensile stress reinforcement zone, the spacing of the transverse bars shall not exceed 300 mm, in the transverse tensile stress reinforcement zone 100 mm.


The stirrup spacing in the longitudinal direction of the column shall be not less than 100 mm (splitting tensile stress zone) and 50 mm (transverse tensile stress zone) to prevent buckling of the longitudinal reinforcement with high bearing rotations.

The figures show the reinforcement arrangement in accordance with Booklet 339 DAfStb.


**Further literature:**

1) H. R. Sasse; F. Müller; U. Thormählen; Deutscher Ausschuss für Stahlbeton; Stützenstöße im Stahlbeton-Fertigteilbau mit unbewehrten Elastomerlagern; Booklet 339; 1982

2) M. Flohrer; E. Stephan; Bemessungsdiagramme für die Querkzugkräfte bei Elastomerlagern; Die Bautechnik, Nos. 9 and 12, 1975

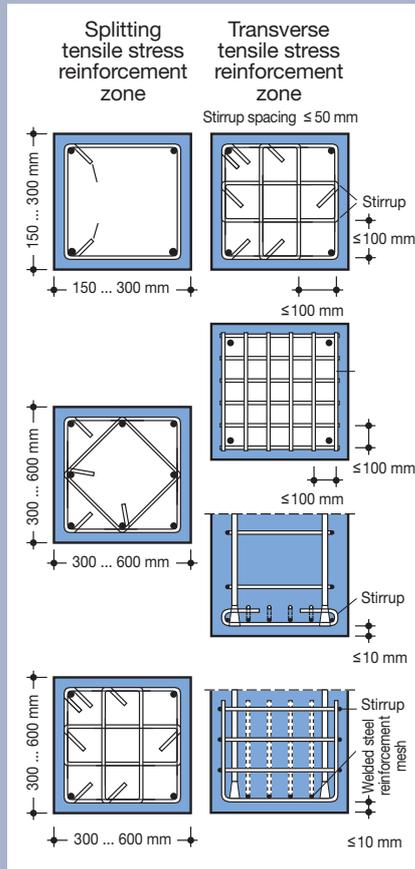


**Recommended transverse reinforcement at support ends in accordance with Booklet 339 DAfStb**

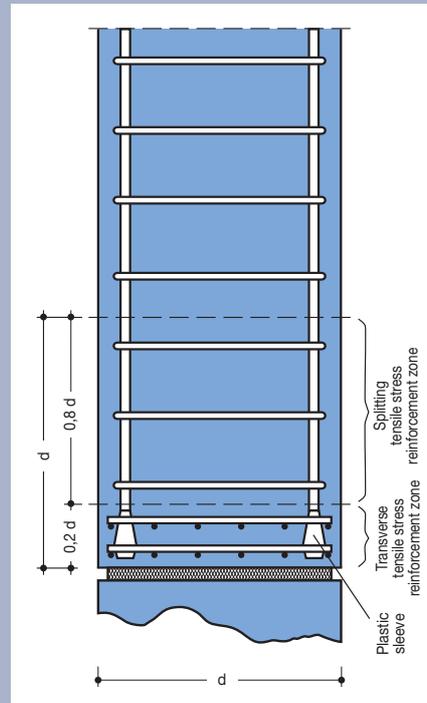

**Reinforcement arrangement at support ends in accordance with Booklet 339 DAfStb**


# Transverse and splitting tensile stress reinforcement

# Edge distances

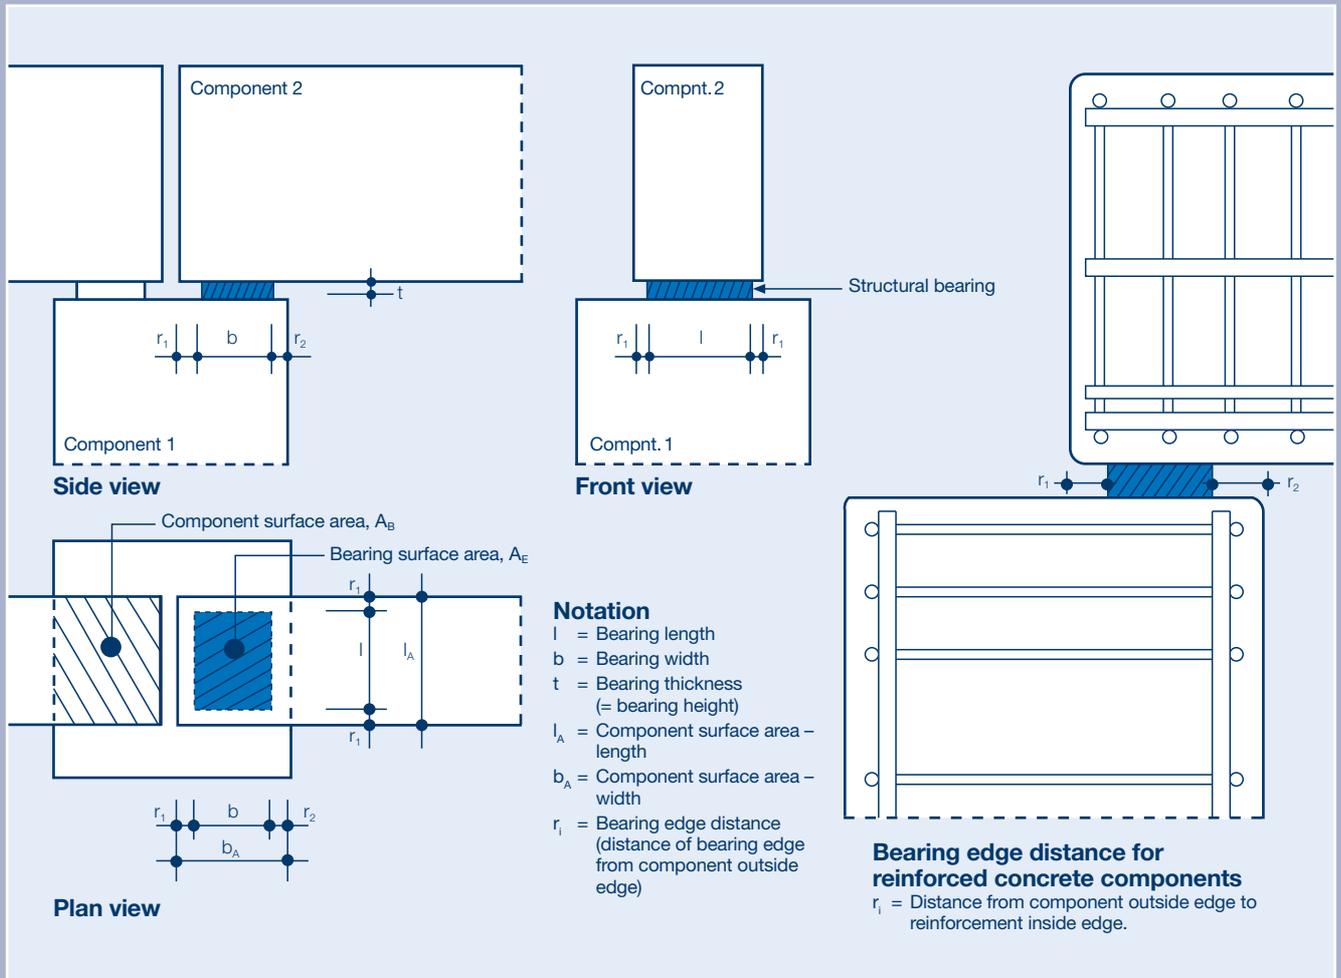


Maximum plan dimensions of an elastomeric bearing for reinforced concrete structures. The provisions of DIN 1045-1 and DAfStb Booklet 525 must be observed. In the case of timber or steel components, the edge distances must be at least 3 cm.

**Standard cut-outs:**

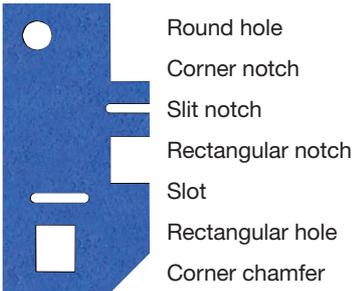


- Round hole
- Corner notch
- Slit notch
- Rectangular notch
- Slot
- Rectangular hole
- Corner chamfer

Point and strip bearings in precast construction



Point and strip bearings in in-situ construction; embedded in polystyrene or Ciflamon with cover

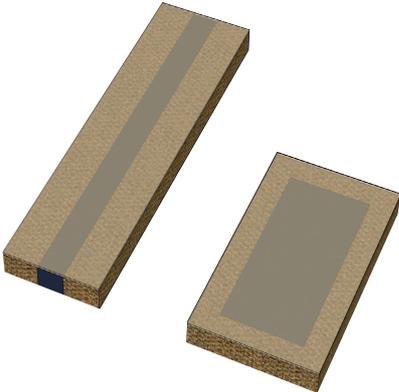

**Delivery forms, dimensions**

Calenberg Compact Bearings CR 2000 are supplied cut to the plan sizes required for each structure. Holes, cut-outs, slots etc. can be provided to allow bolts or dowels to pass through the bearings.

The bearings can be embedded in polystyrene at the factory for installation in in-situ concrete structures. Where fire resistance classes F 90 or F 120 are required, the bearings are supplied embedded in a Ciflamon fire protection board at least 30 mm wide.

**Dimensions:**

- Bearing thicknesses: 11, 16, 21 mm
- Maximum cut size: 1200 mm x 1200 mm

*Calenberg Compact Bearing CR 2000, standard cut-outs and bearing types*

**Delivery forms**

# Test certificate

## Test certificate, proof of suitability

- National Technical Approval No. 850.0425 Basic investigations for the classification of Compact Bearings CR 2000 in accordance with DIN 4141 Part 3, Testing Institute for Mechanical Engineering Materials and Plastics, Technical University of Hannover, 2000
- Fire safety assessment no. 3799/7357-AR; assessment of Calenberg elastomeric bearings regarding classification into the fire resistance class F 90 or F 120 according to DIN 4102 part 2 (issued 9/1977); Accredited Material Testing Authority for Civil Engineering at the Institute for Construction Materials, Reinforced Concrete Construction and Fire Protection, Technical University, Braunschweig; March 2005
- National Technical Approval No. Z-16.32-435, Calenberg Compact Bearing CR 2000, Deutsches Institut für Bautechnik; Berlin; 2003

## Use and areas of application

Calenberg Compact Bearings CR 2000 are used in all areas of construction as permanently elastic articulating connection elements. Their main use is as point bearings for providing elastic support to beams and joists, and as strip bearings under decks and walls.

## Installation

**In precast construction**, no special constructional measures are required where Compact Bearings CR 2000 are installed centrally on the bearing surface. In the case of concrete components, the distance from the bearing edge to the outside edge of the component must be at least 3 cm and the plan area of the bearing must be enclosed by reinforcement. Chamfered component edges are to be similarly treated.

**In in-situ concrete construction**, the bearing joint must be filled and covered so that no concrete can penetrate it. A rigid connection must be avoided; the spring effect of the bearing must be guaranteed in every case.

## Fire behaviour

Fire Safety Report No. 3799/7357-AR by the Technical University (TU) of Braunschweig shall be determinant for elastomeric bearings installed in situations where fire safety has to be taken into account. The report describes minimum dimensions and other measures that fulfil the requirements of DIN 4102-2: Fire Behaviour of Building Materials and Building Components, 1977-09.

The contents of the publication in the result of many years of research an experience gained in application technology. All information is given in good faith; it does not represent a guarantee with respect to characteristics an does not exempt the user from testing the suitability of products and from ascertaining that the industrial property rights of third parties are not violated. No liability whatsoever will be accepted for damage – regardless of its nature and its legal basis – arising from advice given in this publication. This does not apply in the event that we or our legal representatives or our management are found guilty of having acted with intent or gross negligence. The exclusion of liability applies also to the personal liability of or legal representatives and employed in performing our obligations.

**Calenberg Ingenieure GmbH**  
Am Knübel 2-4  
D-31020 Salzhemmendorf, Germany  
Phone +49 (0) 51 53/94 00-0  
Fax +49 (0) 51 53/94 00-49  
info@calenberg-ingenieure.de  
www.calenberg-ingenieure.de